


Dielectric Duplexer (Mono Type)

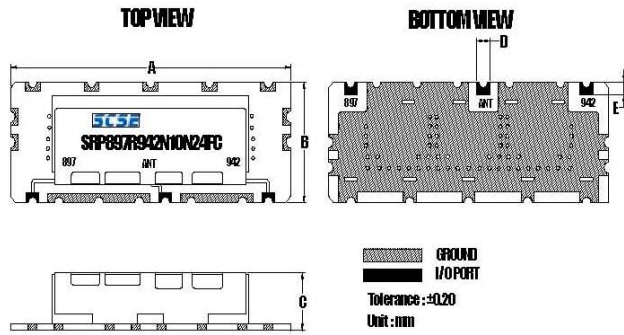

Part No.	Center Freq fo(MHz)		BW (MHz)	Insertion Loss (dB)max	VSWR max	Attenuation (dB)min (MHz)	Dimension W X L X H	Applications
	Tx	Rx						
SRC830F875F8N10FA	Tx	830.0	fo±5	2.5	1.7	45(fr ± 5)	24 X 10 X 4.1	CHINA CDMA
	Rx	875.0	fo±5	3.2	1.7	50(ft ± 5)		
SRP830F875F10N10FA	Tx	830.0	fo±5	2.4	1.5	45(fr ± 5)	30 X 12 X 5.3	
	Rx	875.0	fo±5	3.3	1.5	60(ft ± 5)	42 X 18 X 9.5	
SRP830F875N10N10FA	Tx	830.0	fo±5	1.8	1.5	60(fr ± 5)	42 X 18 X 9.5	
	Rx	875.0	fo±5	1.8	1.5	60(ft ± 5)		
SRP1950F2140F10N60FA	Tx	1950	fo±30	2.2	1.5	55(fr ± 30)	30 X 8.8 X 5.0	W-CDMA
	Rx	2140	fo±30	2.2	1.5	55(ft ± 30)	43.5 X 13 X 9.5	
SRP1950F2140N10N60FA	Tx	1950	fo±30	1.8	1.5	60(fr ± 30)	43.5 X 13 X 9.5	
	Rx	2140	fo±30	1.8	1.5	55(ft ± 30)		
SRP902F947N10N25FA	Tx	902.5	fo±12.5	2.5	1.5	55(fr ± 12.5)	42 X 18 X 9.5	GSM
	Rx	947.5	fo±12.5	2.5	1.5	55(ft ± 12.5)	57 X 19 X 8.5	
SRP897F942N10N24FC	Tx	897.0	fo±12	2.3	1.5	55(fr ± 12)	57 X 19 X 8.5	
	Rx	942.0	fo±12	2.0	1.5	55(ft ± 12)		
SRC897F942N10N35FA	Tx	897.5	fo±17.5	3.1	1.5	44(fr ± 12.5)	57 X 19 X 7.5	GSM
	Rx	942.5	fo±17.5	3.1	1.5	45(ft ± 12.5)		
SRP1880F1960N10N60FA	Tx	1880.0	fo ± 30	3.0	1.5	50(fr ± 30)	43.5 X 13.5 X 9	US-PCS
	Rx	1960.0	fo ± 30	3.0	1.5	50(ft ± 30)		
SRP1747F1842F10N75FA	Tx	1747.5	fo±37.5	3.2	1.5	30(fr ± 37.5)	29 X 7 X 5.0	DCS
	Rx	1842.5	fo±37.5	3.5	1.5	30(ft ± 37.5)	40.5 X 8.2 X 8.2	
SRC1747F1842F10N75FA	Tx	1747.5	fo±37.5	2.5	1.5	22(fr ± 37.5)	40.5 X 8.2 X 8.2	
	Rx	1842.5	fo±37.5	2.5	1.5	22(ft ± 37.5)		
SRP836F881N10N25FA	Tx	836.5	fo±12.5	2.5	1.5	55(fr ± 12.5)	42 X 17 X 9.0	KOREA CDMA
	Rx	881.5	fo±12.5	2.5	1.5	55(ft ± 12.5)		
SRC1760F1850F10N20FA	Tx	1760.0	fo±10.0	2.3	1.5	60(fr ± 10)	27.1 X 6.4 X 4.1	KOREA PCS
	Rx	1850.0	fo±10.0	2.3	1.5	60(ft ± 10)		