
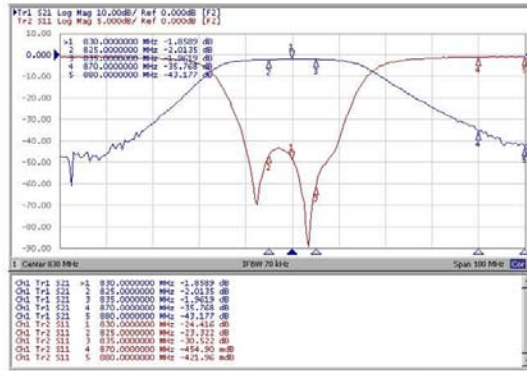


Dielectric Filters (Mono Type)

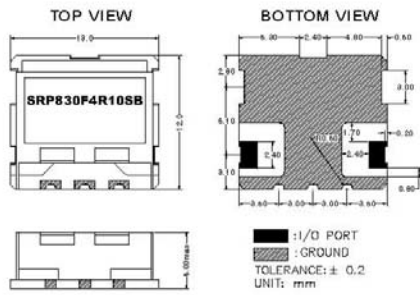

Part No.	Center Freq fo(MHz)	BW (MHz)	Insertion Loss (dB)max	Ripple (dB)max	VSWR max	Attenuation (dB)min (MHz)	Dimension W X L X H	Applications
SRM830F3R10SA	830.0	fo±5	3.5	1.0	2.0	28(fo ± 40)	12 X 9 X 4.0	CHINA
SRM875F3R10SA	875.0	fo±5	3.5	1.0	2.0	28(fo ± 40)	12 X 9 X 4.0	
SRP830F4R10SB	830.0	fo±5	3.5	1.0	1.5	40(fo ± 40)	13 X 12 X 5.0	CDMA
SRP875F4R10SB	875.0	fo±5	3.5	1.0	1.5	40(fo ± 40)	13 X 12 X 5.0	
SRM902K5N25FA	902.5	fo±12.5	2.0	1.0	1.5	40(fo+32.5)	30 X 8.3 X 6.5	GSM
SRM947K4N25FA	947.5	fo±12.5	2.0	1.0	1.5	40(fo-32.5)	25 X 8.3 X 6.5	
SRP902N10R25FA	902.5	fo±12.5	3.0	1.0	1.5	65(fo ± 32.5)	42 X 17 X 9.0	E-GSM
SRP902N10R25FA	947.5	fo±12.5	3.0	1.0	1.5	65(fo ± 32.5)	42 X 17 X 9.0	
SRP897N10R35FA	897.5	fo±17.5	5.0	2.5	1.5	30/25(fo ± 25)	42 X 17 X 9.0	W-CDMA
SRP942N10R35FA	942.5	fo±17.5	5.0	2.5	1.5	25/30(fo ± 25)	42 X 17 X 9.0	
SRM1950F3R60SA	1950.0	fo±30.0	2.5	1.0	1.5	40(fo+160)	11.5 X 6 X 3.9	DCS
SRM2140F3R60SA	2140.0	fo±30.0	2.5	1.0	1.5	40(fo-160)	11.5 X 6 X 3.9	
SRM1747B3R75SA	1747.5	fo±37.5	3.0	1.0	1.8	25(fo+132.5)	5.7 X 4.4 X 2.0	MMDS
SRM1842B3R75SA	1842.5	fo±37.5	3.0	1.0	1.8	30(fo-132.5)	5.7 X 4.2 X 2.0	
SRM1747F5N75FA	1747.5	fo±37.5	3.5	2.0	1.8	20(fo+57.5)	13.5 X 6.5 X 4.0	K-PCS
SRM1842F5N75FA	1842.5	fo±37.5	3.5	2.0	1.8	25(fo-57.5)	13.5 X 6.5 X 4.0	
SRC3420F4R40SA	3420.0	fo±20.0	2.5	0.5	1.5	35(fo ± 100)	15.0 X 5.7 X 4.5	US-PCS
SRC3520F4R40SA	3520.0	fo±20.0	2.5	0.5	1.5	35(fo ± 100)	15.0 X 5.7 X 4.5	
SRM3462D3R27SA	3462.5	fo±13.5	3.0	1.0	1.5	15(fo ± 86)	8.3 X 7.5 X 3.0	K-PCS
SRM3562D3R27SA	3562.5	fo±13.5	3.0	1.0	1.5	15(fo ± 86)	8.3 X 7.2 X 3.0	
SRM3450D3R100SA	3450.0	fo±50.0	2.3	1.0	1.5	12(fo + 150)	8.3 X 4.5 X 3.0	K-PCS
SRM3550D3R10SA	3550.0	fo±50.0	2.3	1.0	1.5	15(fo - 150)	8.3 X 4.5 X 3.0	
SRP1690F4R20SA	1690.0	fo±10.0	2.5	0.5	1.5	45(fo + 70)	13 X 12 X 5.0	K-PCS
SRP1705F4R40SA	1705.0	fo±10.0	3.0	0.5	1.5	45(fo + 70)	13 X 12 X 5.0	
SRP1765F4R30SA	1765.0	fo±15.0	2.5	0.8	1.5	30/45(fo ± 75)	13 X 12 X 5.0	K-PCS
SRP1765F4R30SB	1765.0	fo±15.0	2.5	0.8	1.5	45/30(fo ± 75)	13 X 12 X 5.0	
SRP1760F4R20SA	1760.0	fo±10.0	2.8	0.5	1.5	30/45(fo ± 75)	13 X 12 X 5.0	K-PCS
SRP1850F4R20SA	1850.0	fo±10.0	2.8	0.5	1.5	30/45(fo ± 75)	13 X 12 X 5.0	
SRP1880N10N60FA	1880.0	fo±30.0	4.0	2.0	1.5	50(fo ± 50)	43.5 X 13 X 9.0	US-PCS
SRP1960N10N60FA	1960.0	fo±30.0	4.0	2.0	1.5	50(fo ± 50)	43.5 X 13 X 9.0	